


1.2. Types and Features of the Flat Roller

● Models FT and FT-V


These models have a single row of rollers and are mainly used on the flat surface.

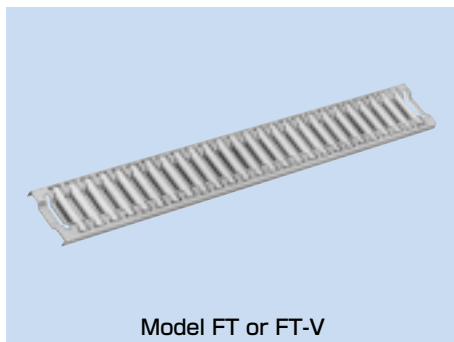

Model FT or FT-V

● Models FTW and FTW-V

These models have two or more rows of rollers, and their cages are shaped to bend at 90°. It uses rollers with a diameter 0.7071 times greater than that of the rollers on the flat surface so that model FT or FT-V can be mounted on the 90° V surface at the same height if model FT or FT-V is used on the flat surface.

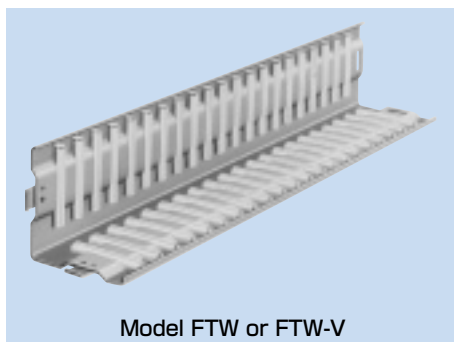

Model FTW or FTW-V